



Container Specifications




INTERNAL DIMENSIONS			DOOR		CUBIC	MAXIMUM
L	W	H	W	H	CAPACITY	PAYLOAD
20' STANDARD						
5.9m	2.35m	2.39m	2.34m	2.28m	33.20m ³	28,260 kgs
19'4"	7'8"	7'10"	7'8"	7'6"	1,170 Cft	62,310 Lbs

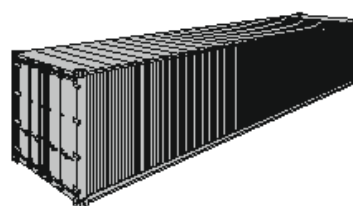


INTERNAL DIMENSIONS			DOOR		CUBIC	MAXIMUM
L	W	H	W	H	CAPACITY	PAYLOAD
40' STANDARD						
12.03m	2.35m	2.39m	2.34m	2.28m	67.7m ³	28,860 kgs
39'6"	7'9"	7'10"	7'8"	7'6"	2,391 Cft	63,620 Lbs
40' HIGH CUBE						
12.03m	2.35m	2.7m	2.34m	2.58m	76.4m ³	28,860 kgs
39'6"	7'9"	8'10"	7'8"	8'6"	2,700 Cft	63,180 Lbs




INTERNAL DIMENSIONS			ROOF		CUBIC	MAXIMUM
L	W	H	L	W	CAPACITY	PAYLOAD
20' OPEN TOP						
5.90m	2.35m	2.35m	5.38m	2.25m	32.23m ³	28,180 kgs
19'4"	7'8"	7'8"	17'7"	7'4"	1,138 Cft	62,126 Lbs

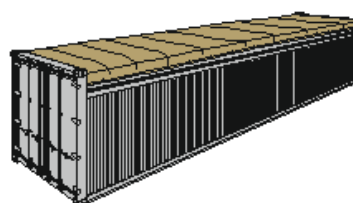

INTERNAL DIMENSIONS			ROOF		CUBIC	MAXIMUM
L	W	H	L	W	CAPACITY	PAYLOAD
40' OPEN TOP						
12.03m	2.35m	2.35m	11.51m	2.23m	66.5m ³	26,680 kgs
39'6"	7'9"	7'8"	37'9"	7'4"	2,348 Cft	58,819 Lbs




INTERNAL DIMENSIONS			ETWEEN ENDS		BETWEEN CORNERS		MAXIMUM
L	W	H	L	L	W	W	PAYLOAD
20' COLLAPSIBLE FLAT RACK							
5.96m	2.4m	2.29m	5.86m	5.42m	2.06m	37,000 kgs	
19'7"	7'10"	7'6"	19'2"	17'9"	6'9"	81,580 Lbs	



INTERNAL DIMENSIONS			ETWEEN ENDS		BETWEEN CORNERS		MAXIMUM
L	W	H	L	L	W	W	PAYLOAD
40' COLLAPSIBLE FLAT RACK							
11.65m	2.37m	1.96m	12.06m	11.66m	2.22m	44,650 kgs	
38'3"	7'9"	5'5"	39'7"	38'3"	7'3"	98,436 Lbs	



INTERNAL DIMENSIONS			DOOR		CUBIC	MAXIMUM
L	W	H	W	H	CAPACITY	PAYLOAD
20' REEFER						
5.45m	2.29m	2.16m	2.29m	2.26m	23.30m ³	27,540 kgs
17'10"	7'6"	7'1"	7'6"	7'5"	999 Cft	60,720 Lbs



INTERNAL DIMENSIONS			DOOR		CUBIC	MAXIMUM
L	W	H	W	H	CAPACITY	PAYLOAD
40' HIGH CUBE REEFER						
11.59m	2.29m	2.40m	2.29m	2.37m	67.9m ³	30,260 kgs
38'	7'6"	7'10"	7'6"	8'5"	2,397 Cft	66,712 Lbs

The dimensions given are typical sizes and are given only as an indication.